

TECHNICAL SPECIFICATIONS

GENERAL INFORMATION

Venue address:

Poppodium VOLT (onderdeel van De Domijnen)

Odasingel 88

6131 GZ, Sittard-Geleen

The Netherlands

Web address: Mail address: http://www.poppodium-volt.nlinfo@poppodium-volt.nl

Telephone: +31 (0)46- 400 73 53

Technical contact:

Dennis Siemonsma | dennis.siemonsma@dedomijnen.nl

Parking:

Limited parking space for vans, trucks or touring busses is available on the venue square, only in consultation with the

production crew.

WiFi:

Wireless internet is available throughout the venue. Password

on request at the production crew.

Dressing rooms:

Two dressing rooms are available at the venue. Outside are one toilet and one shower room available to be used by all

parties.

RESTRICTIONS

Get-in:

In case of late arrival sound check time will be cut short accordingly. Early get-in only possible in consultation with

production crew (due to extra costs).

Special effects:

Confetti, snow/bubbles, pyrotechnics or other kinds of effects only possible if discussed well in advance with the production

crew (due to possible permits).

Poppodium VOLT Odasingel 88 6131 GZ Sittard

SPL:

Smoking:

There is a sound level restriction of 103 dBA (measured at the FOH position) in the large and small room. In the café there is

a sound level restriction of 85 dBA.

is een onderdeel van:

Stichting De Domijnen

Postbus 65

6131 AB Sittard-Geleen

T: +31 46 400 73 53 E: info@poppodium-volt.nl

KvK: 59834161

BTW: NL853661406B01

Smoking is prohibited in the whole venue, except the smoking room. Smoking in the dressing rooms is only approved if

discussed with the production crew in advance.

LARGE ROOM Capacity: 600 pax maximum = 300 pax at ground level = 100 pax at balcony = 200 pax at small room (possible to add small room to big room by removing the wall in between) 10.00m wide x 5.00m deep x 1.05m high Stage: Clearance: 4.40m (stagefloor <> lights) FOH position: Centered in room, about 7.00m from stage Power audio: Schuko 230V/16A at stageleft Schuko 230V/16A at stageright Schuko 230V/16A at stagerear Schuko 230V/16A at FOH CEE-form 400V/32A at stageleft PA system: Meyer Sound UPQ-1P 4pc. (left + right ground floor & left + right balcony) 2pc. Meyer Sound UPA-2P (infill ground floor) Meyer Sound 1100LFC 2pc. (subwoofers centered below stage) Meyer Sound UPJ-1P 2pc. (delay under balcony, for small room) 1pc. Xilica Neutrino + touchpanel 2 channel input (left + right) or 3 channel input (left + right + sub) possible. No limiters active. 2pc. Behringer S16 AD/DA Power light: Schuko 230V/16A at stageleft Schuko 230V/16A at stageright Schuko 230V/16A at stagerear Schuko 230V/16A at FOH CEE-form 400V/63A at stageleft CEE-form 400V/125A at dimmer room CEE-form 400V/63A at dimmer room (dimmer room approx. 10m from stage) All room lights powered directly from venue! Lights (stage): 6pc. Elation Satura Spot LED PRO 6pc. Elation Platinum Wash ZFX PRO 2pc. Elation EPAR QW (sixbar; six units) Elation EPAR QW (single; one unit) 12pc. 4pc. Showtec Stage Blinder 2 ADJ SP-1500 DMX MKII strobe 2pc. Poppodium Volt Odasingel 88 Lights (front): 6pc. Selecon PLFresnel1 LED 6131 GZ Sittard Selecon PLProfile1 LED 6pc. Postbus 110 Lights (room): 2pc. Elation EPAR QW (sixbar; six units) 6160 AC Geleen 6pc. Showtec 400W blacklight gun on switchpack T: +31 46 400 73 53 Dimmer: 12 channels of 10A dimming; 6 channels dim + 2 channels of E: info@poppodium-volt.nl 16A power at stageleft and 6 channels dim + 16A power at IBAN: NL28RABO0187610355 stageright, on stage floor level. K.v.K. 41073603 BTW: NL808806245B01

Structural: Prolyte H40V – 8.00m length 3pc. 1pc. Prolyte H40V – 6.00m length Prolyte H40V - 5.00m x 4.00m carré 1pc. CM Lodestar L electric hoist 500kg 12pc. (mounted with pulleys on two rails) Panasonic PT-EW630E projector (5500 ANSI lumen) Projection: Fixed screen behind the stage Communication: ASL PS289 2 channel base-station with fixed output positions at stageleft/stageright/balcony/FOH 4pc. ASL PS19 beltpack 2pc ASL IS141 beacon ASL HS-2/D headset semi-closed 5pc. ASL HR-2/E headset closed 2pc. Backdrop: Standard black Molton curtains around the stage on rails. Banner: Banner can be attached to 50mm pipe underneath the rear truss (max dimension of banner 6m wide x 5m high). >>> PLEASE PROVIDE OWN FIXING MATERIAL <<< Load-in: Internal loading dock at venue, accessible by truck or van (max. height 3.80m). Load-in at stage level (1.05m) or using the elevator (2.20m x 1.50m). Doorway between loading dock and stage, maximum 2.20m x 2.20m Cable feed: Possible to feed cabling trough a hatch from stage left to the outside of the building (pipe diameter is 110mm). **SMALL ROOM** Capacity: 200 pax maximum (150 pax including stage) approx. 6.00m wide x 4.00m deep x 0.40m high Stage: Clearance: 3.45m (stagefloor <> lights) Power audio: Schuko 230V/16A at stageright Schuko 230V/16A at stageright Schuko 230V/16A at room Schuko 230V/16A at FOH CEE-form 400V/32A at stageright PA system: 2pc. Meyer Sound UPQ-1P (left + right) Poppodium Volt 2pc. Mever Sound 700HP (subwoofers left + right) Xilica XP4080 1pc. Odasingel 88 6131 GZ Sittard 2 channel input (left+right) or 3 channel input (left+right+sub) possible. No limiters active. Postbus 110 6160 AC Geleen 1pc. Behringer S16 AD/DA T: +31 46 400 73 53 E: info@poppodium-volt.nl Power light: Schuko 230V/16A at stageright Schuko 230V/16A at stageright IBAN: NL28RABO0187610355 CEE-form 400V/32A at stageright K.v.K. 41073603 BTW: NL808806245B01 All room lights powered directly from venue!


Lights (stage): 2pc. Sixbar (containing Elation EPAR QW) Elation EPAR QW 4pc. Antari HZ-350 hazer 1pc. Lights (front): Selecon PLFresnel1 LED 2pc. Selecon PLProfile1 LED 2pc. Lights (room): Elation EPAR QW 6pc. Structural: Fixed piping grid above the stage and around the room. Backdrop: Standard black Molton curtains around the room and stage on rails. Possible to attach own banner to the piping above the stage Banner: (max size 6.00m wide x 4.00 high). >>> PLEASE PROVIDE OWN FIXING MATERIAL <<< Internal loading dock at venue, accessible by truck or van Load-in: (max. height 3.80m). Load-in at stage level (1.05m) or using the elevator (2.20m x 1.50m). Corridor between loading dock and small room, maximum 2.10m x 0.75m. or Possible to load-in trough the emergency exit and hallway, maximum 2.85m x 1.15m. CAFÉ 4.15m width x 3.75m deep x 0.49m high Stage: Power: Schuko 230V/16A at ceiling Schuko 230V/16A around the room CEE-form 400V/16A at stage PA system: 2pc. LEM H350 (left + right front) 2pc. LEM H300 (left + right rear) 1pc. LEM Procon 750 amp (2 channel mono to front/rear) Controls: 1pc. Numark 200FX MKII DAP Audio CDR110 (CD/MP3/SD/USB) 1pc. **GLP Light Operator 24** 1pc. Lights (front): Showtec PAR64 short 500W (on dimpacks) 4pc. Poppodium Volt Lights (room): 10pc. Elation EPAR QA Odasingel 88 Projection: Projector (2500 ANSI lumen) 6131 GZ Sittard Prolyte H30V - 16.00m length Postbus 110 Structural: 2pc. 6160 AC Geleen T: +31 46 400 73 53

E: info@poppodium-volt.nl

IBAN: NL28RABO0187610355

K.v.K. 41073603 BTW: NL808806245B01

FIXED INFRASTRUCTURE						
	Audio large room:	12 ch. of analog tie-line from stageleft to FOH 12 ch. of analog tie-line from stageright to FOH				
		2 ch. of analog sends from the balcony to stageleft				
		1 ch. o	4 ch. of CAT5 between stageleft and FOH 1 ch. of CAT5 between stageright and FOH 2 ch. of CAT5 between balcony and stageleft			
	Lights large room:	4 ch. of DMX 3p. sends from FOH to the dimmer room 1 ch. of ArtNET between FOH to the dimmer room				
		5 ch. o 2 ch. o	ch. of DMX 3p. return from dimmer room to stageright ch. of ArtNET between dimmer room and stageright ch. of DMX 3p. return from dimmer room to balcony ch. of ArtNET between dimmer room and balcony			
	Audio small room:	2 ch. o 2 ch. o	f analog tie-line from sta f analog tie-line from sta	nalog tie-line from FOH to stageright halog tie-line from stageright to FOH halog tie-line from stageleft to stageright halog tie-line from stageright to stageleft		
			f CAT5 between stageright and FOH position f CAT5 between stageleft and stageright			
	Lights small room:	1 ch. o 1 ch. o	f ArtNET between FOH the following from standard from the following from the	n FOH to the dimmer room FOH to the dimmer room In stageright to the dimmer room Itageright to the dimmer room		
		3 ch. o 2 ch. o	DMX 3p. return from dimmer room to the room ArtNET between dimmer room and the room DMX 3p. return from dimmer room to stageleft ArtNET between dimmer room and stageleft			
	DMX venue:	2pc. 1pc. 1pc. 1pc.	Elation Opto Branch 8 DMX distro large room Elation Opto Branch 8 DMX distro small room NETGEAR ProSafe switch for ArtNET venue Briteq BT-NODE28 ArtNET node			
	LOOSE PARTS (to be used by all rooms)					
	Mixing console:	g console: 2pc. Behringer X32 digital				
	Stagebox:	1pc.	Behringer S16 AD/DA	DA		
Poppodium Volt	Siderack FOH:	1pc. 1pc.	BSS FCS966 2x31b EQ NewHank DUS1 (CD/DVD/MP3/SD player)			
Odasingel 88 6131 GZ Sittard	Monitors:	8pc.	Meyer Sound MJF210			
Postbus 110 6160 AC Geleen T: +31 46 400 73 53 E: info@poppodium-volt.nl	Microphones:	2pc. 2pc. 4pc. 12pc. 8pc.	Shure Beta91A Shure Beta52A Shure Beta57A Shure Beta58A Shure SM57-LCE	8pc. 4pc. 6pc. 6pc. 6pc.	Sennheiser E904 Sennheiser E906 RØDE NT55 BSS AR133 active DI ART PDB passive DI	
IBAN: NL28RABO0187610355 K.v.K. 41073603 BTW: NL808806245B01	Stands:	16pc. 16pc.	Konig & Meyer large st Konig & Meyer small st			

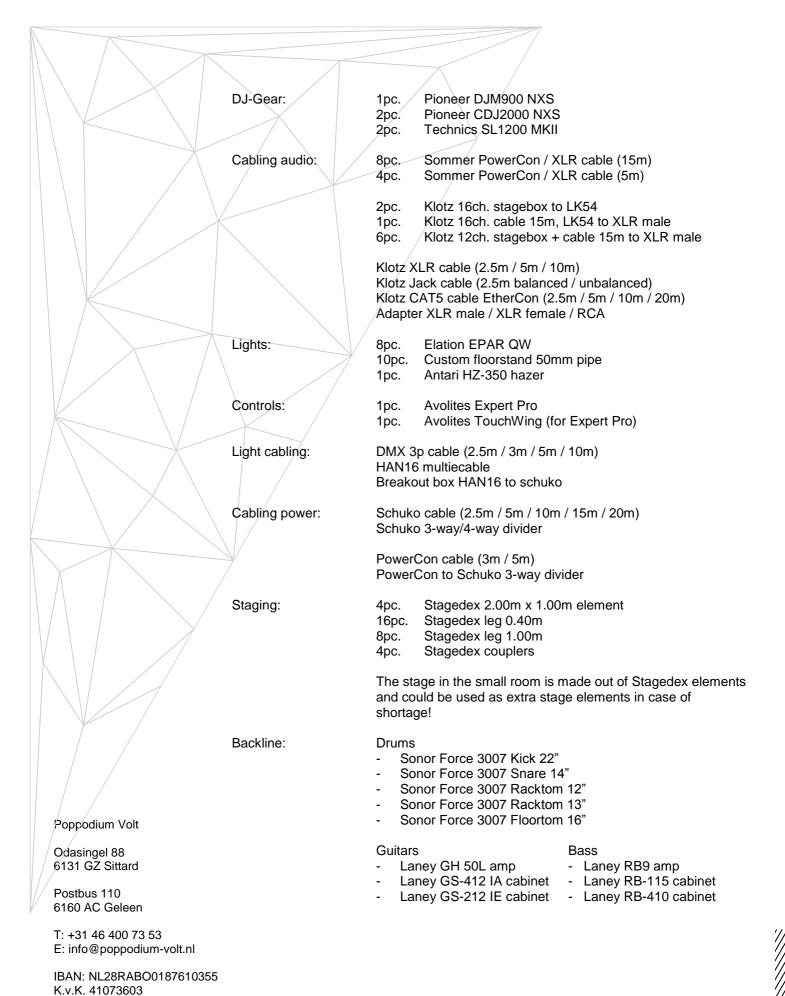

BTW: NL808806245B01